

# 700-24 MagnaValve®

## Ceramic Media Valve for Air Blast Machines

### Features

- $\pm 5\%$  full-scale accuracy
- Normally closed
- Meets specification 2432D
- 24 Vdc operation
- Only one moving part
- CE compliant

### Description

The Model 700-24 MagnaValve® is a normally closed valve that regulates the flow of ceramic media in either direct pressure or suction air blast machines. The MagnaValve's built-in sensor measures flow rate and, together with the FC-24 Controller (sold separately), provides accurate and repeatable flow rates. The valve meets the accuracy requirements of SAE AMS 2432D and other aerospace and commercial specifications required for shot peening applications. Contact the factory for more information. Each valve will be pre-calibrated with customer-specified media. Ceramic Bead or Glass Bead can be used in this valve. Other non-ferrous materials, such as Aluminum Oxide (AlOx), may also be used by special arrangement. Contact the factory for more information. Each valve will be pre-calibrated with customer-specified media.


### How It Works

The MagnaValve's construction incorporates an electromagnetically controlled plunger for media flow control. The plunger rests in an orifice. With power applied, an electromagnet raises the plunger to allow media to flow through the valve. The media falls past the plunger and drops onto a paddle, bending it according to the media's flow rate and thereby producing an accurate flow rate signal. When no power is applied to the MagnaValve, the plunger returns to its rest position and stops all media flow. If the power is interrupted for any reason, the plunger returns to the rest position and securely holds the media, thereby virtually eliminating media leakage.

### Closed Loop Operation

The FC-24 Controller provides a closed-loop system for the MagnaValve. The MagnaValve and controller provide accurate regulation of non-ferrous media in shot peening and blast cleaning applications where accurate and repeatable flow rates are desired. The controller may operate as a stand-alone control or work with a customer's programmable controller via standard analog 0-10 Vdc interface. The flow rate signal from the MagnaValve is used as the flow rate feedback signal to the FC-24 Controller.

US Patent 9,126,305 B2 • US Patent 8,388,407 B1 • Japan Patent 6313057

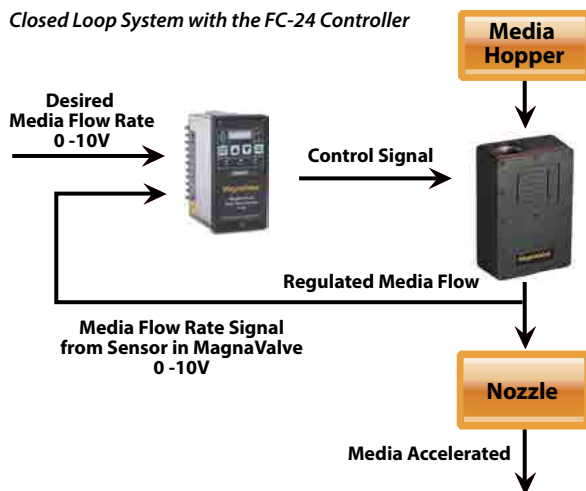

FC-24 Controller  
(sold separately)

**EI** **Electronics Inc.**  
*Shot Peening Control*

Electronics Inc.  
56790 Magnetic Drive  
Mishawaka, Indiana 46545 USA  
(574)256-5001  
[www.electronics-inc.com](http://www.electronics-inc.com)

Specification is subject to change without notice  
2024-07

MagnaValve is a registered trademark of Electronics Inc.

**Specifications**

Power	24 Vdc $\pm$ 2 Vdc @ 2A	Servo Command Input	0 - 10 Vdc
Media	Ceramic Bead	Flow Enable Input	24 Vdc
Maximum Pressure	60 PSI	Flow Sensor Output	0 - 10 Vdc, max output 11.5 Vdc
Mode	Normally Closed	Weight	19.4 lb. (8.8 kg)
Temperature Range	40°F - 110°F (5°C - 43°C)	Flow Ports	Top (entry) and Bottom (exit) are 2" NPT Female Threads

**Media Flow Rates**

	Ceramic Bead			
Media Size	100	150	300	425
Flow Range	1.3 - 13 lb .6 - 6 kg	1.3 - 13 lb .6 - 6 kg	2.0 - 20 lb 1 - 10 kg	2.0 - 20 lb 1 - 10 kg

**Please note:** For proper operation, media must be free from ferrous contamination and fines (broken media and dust). The media must be free flowing. Install a magnetic separator and a screen separator in the reclaim system to ensure necessary media quality.

**Dimensions**

Inches (Metric)

